



MEGAMAN[®]

Absorbent Lined Nitrile Industrial Gloves

PRODUCT DESCRIPTION


SPECIFICATIONS

PRODUCT:	Megaman		
GRADE:	Powder-Free Industrial		
MATERIAL:	Nitrile		
THICKNESS	Finger:	10.1mil	0.26mm
	Palm:	8.5mil	0.22mm
	Cuff:	7.0mil	0.18mm
COLOR	Outer:	Black	
	Inner:	Black	
SURFACE	Outer:	Fully Textured	
	Inner:	Hydrex	
LENGTH:	11.0"	280mm	
WEIGHT*:	12.0g		
FIT TYPE:	Ambidextrous		
CUFF TYPE:	Beaded		
WATERTIGHT AQL:	1.5		
ORIGIN COUNTRY:	China		

*Specification based on size medium gloves

STANDARDS & CERTIFICATIONS

EN 420:2003
 REACH EU 1907/2006
 DIRECTIVE 2011/65/EU
 EU Reg 528/2012
 CAT III COMPLEX DESIGN
 FDA 21 CFR 177.2600
 Component materials comply with FDA regulations for food contact.

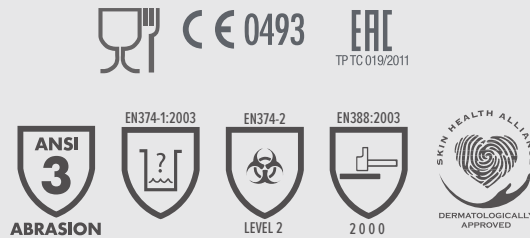

For Industrial Use

Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260881	XS 5.5-6	3.0" 76mm	50 gloves per box 10 boxes per case
N260882	S 6.5-7	3.4" 87mm	50 gloves per box 10 boxes per case
N260883	M 7.5-8	3.8" 97mm	50 gloves per box 10 boxes per case
N260884	L 8.5-9	4.3" 109mm	50 gloves per box 10 boxes per case
N260885	XL 9.5-10	4.5" 114mm	50 gloves per box 10 boxes per case
N260886	XXL 10.5-11	4.9" 125mm	50 gloves per box 10 boxes per case
N260887	XXXL 11.5-12	5.3" 134mm	50 gloves per box 10 boxes per case

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%
FORCE AT BREAK:		

INTEGRATED TECHNOLOGIES

- **DriTek™** lining wicks moisture away from skin.
- **TouchTek™** protects skin and prevents contamination.
- **MilTek™** offers durability and tactile sensitivity.



APPLICATIONS

- Light Machining Operations
- Chemical Handling
- Assembly
- Maintenance
- Waste Management
- Janitorial Maintenance
- Fabrication

STORAGE

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.

