

## DOUBLE-PLY MEDIUM WEIGHT CUT RESISTANT SLEEVES

A range of comfortable cut resistant sleeves containing heat resistant properties.

### FEATURES

- › Cut resistant: Level C (EN 388:2003)
- › Thumbhole prevents slipping and wrist exposure
- › Gives increased protection from cuts, slash, tear and punctures
- › Machine knitted double-ply medium weight sleeve
- › Comfortable and protective, the seamless knitted liner avoids skin irritation and is elasticated for extra protection
- › Machine washable
- › Available in three lengths - 14", 18"
- › Ambidextrous



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Automotive
- Glass
- Manufacturing
- Paper and Pulp
- Plastics
- Steel

#### Suitable Applications

- Castings
- Handling Large Sheets of Materials with Sharp Edges
- HVAC
- Sheet Metal Handling

### CERTIFICATION

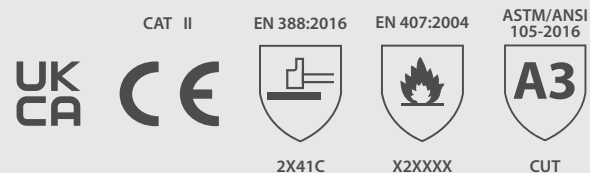

See overleaf for explanation

PRODUCT INFORMATION		
MATERIALS	LINER:	Para-aramid
	COATING:	N/A
COLOUR	Yellow	
LENGTH (mm)	14", 18"	
CUFF STYLE	Elasticated	

- | RECOMMENDATIONS FOR USE   |
|---|
| <ul style="list-style-type: none"> <li>• <b>USE:</b> Cut resistant sleeve. Not suitable for electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement</li> <li>• <b>STORAGE:</b> Store in dry conditions in the original packaging and away from direct sunlight</li> <li>• <b>CLEANING:</b> To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.</li> <li>• <b>LIFETIME:</b> Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use</li> </ul> |

ORDERING DETAILS		
SIZE	CODE	PACKAGING
14" 18"	SKG00037CZ SKG00038CZ	96 pieces per case

CERTIFICATION LEGENDS	
<p><b>MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*</b></p> <p>0-4   0-5   0-4   0-4   A-F   P</p> <p>Abrasion Resistance   Circular Blade Cut Resistance   Tear Resistance   Puncture Resistance   Straight Blade Cut Resistance (EN ISO: 13997)   Impact Resistance</p> <p>*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter</p>	<p><b>HEAT AND FIRE EN 407</b></p> <p><b>PERFORMANCE LEVELS</b></p> <p>0-4   0-4   0-4   0-4   0-4   0-4</p> <p>Burning Behaviour   Contact Heat Resistance   Convective Heat Resistance   Radiant Heat Resistance   Resistance to Small Drops Of Molten Metal   Resistance to Large Splashes of Molten Metal</p>

**EUROPE**  
[www.globusgroup.com](http://www.globusgroup.com)  
**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**  
[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)  
**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

