

EXCELLENT PROTECTION FOR ALL MECHANICAL HAZARDS

Extremely durable and delivers great resistance to cuts, abrasion, tearing and punctures without compromising dexterity, sensitivity and comfort.

FEATURES

- › Cut resistance performance:
 - Level 5 (EN 388: 2003)
 - Level C (EN 388:2016)
- › Bi-polymer coating ensures excellent grip in wet and dry handling conditions
- › Level 4 resistance (EN 388) for abrasions and rips
- › Anatomically designed for comfort, dexterity and fit
- › Glove retains flexibility despite its high protection levels
- › Machine knitted liner made with High Performance Polyethylene and glass yarn to provide a good cut resistance barrier
- › Sanitized® antimicrobial finish provides extra freshness
- › Elasticated wrist provides a secure fit



SUITABLE FOR


Typical Industries

- Aerospace
- Automotive
- Ceramics
- Construction
- Engineering
- Glass
- Plastics

Suitable Applications

- Bodyshop
- Handling Materials with Sharp Edges
- Injection Moulding
- Metal Fabrication

CERTIFICATION

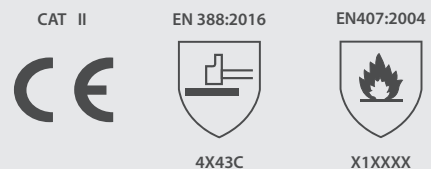

See overleaf for explanation



NINJA KNIGHT™

ALSO KNOWN AS SAPPHIRE KNIGHT™

	CUT PROTECTION
	HEAT PROTECTION

SUITABLE FOR		
MATERIALS	LINER:	HPPE/Glass Fibre/Nylon
	COATING:	Bi-polymer
COLOUR	Grey/Black	
LENGTH (mm)	220-250 (size dependent)	
CUFF STYLE	Elasticated Knit Wrist	

- ### RECOMMENDATIONS FOR USE
- It is the responsibility of the end user and not the manufacturer to determine glove suitability for the intended use.
 - Do not use in cases of electrical, chemical or high thermal risks (over 100°C).
 - Do not use near moving machines if there is a risk of entanglement.
 - These gloves resist cuts but are not cut proof. Do not subject to high speed or serrated blades.
 - Storage: Gloves should be ideally stored in cool, dry conditions in original packaging and away from direct sunlight.
 - Cleaning/Maintenance: Both new and used gloves should be thoroughly inspected before being worn to ensure no damage is present. Gloves should not be left in contaminated condition if reuse is intended in which case gloves should be cleaned as far as possible. If appropriate, decontamination may take place under lukewarm water using laundry soap and detergent. Don't use chlorine bleaches.

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY271	10 pairs per pack
8/M	SKY272	120 pairs per case
9/L	SKY273	
10/XL	SKY274	
11/XXL	SKY275	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

HEAT AND FIRE EN 407

PERFORMANCE LEVELS

0-4	0-4	0-4	0-4	0-4	0-4
Burning Behaviour	Contact Heat Resistance	Convective Heat Resistance	Radiant Heat Resistance	Resistance to Small Drops Of Molten Metal	Resistance to Large Splashes of Molten Metal

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

© 2019 Globus (Shetland) Ltd | SKY-DATA-NINJA-KNIGHT-1019_1

EC compliance certificate delivered by the notified body LEITAT Centro Tecnológico, Passeig 22 de juliol, 218-08221, Terrassa (Barcelona), Spain (Notified Body No 0162)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.