

Information User instruction

Safety gloves against thermic and mechanical risks

Manufacturer

UVEX SAFETY Gloves GmbH & Co. KG
Elso-Klöver-Str. 6, 21337 Lüneburg
Postfach 24 47 · 21314 Lüneburg
GERMANY

Tel.: +49 4131 9502-0
Fax: +49 4131 84338
Email: gloves@uvex.de
Website: uvex-safety.de

Type NK2722
Basic glove material sandwich liner, cotton interlock/knitted
aramid
Available sizes 9, 10


Coating material Special NBR (nitrile butadiene
rubber)
Smallest packing unit 50 Pairs

Pictogram and performance levels

EN 407 : 2004



X 1 X X X X **Performance levels**

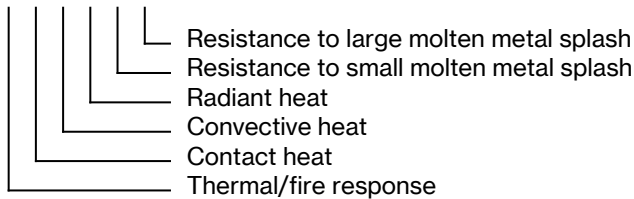


Please note: The actual period of protection on the job is affected by many factors (temperature, abrasion, etc.) and can therefore differ from the performance level!

N.B.: The gloves must not come into contact with open flames where flammability is performance level 1 or 2.

EN 388 : 2003



3 2 4 3 **Performance levels**

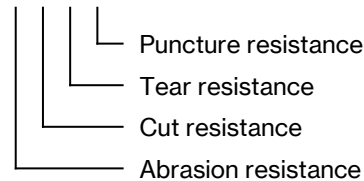

Pictogram and performance levels according to EN 388:2003 (highest performance level: 4/cut resistance: 5)

All levels only apply to the coated areas of the glove.

For multilayer gloves, the performance levels relate to the glove as a whole, including all layers.

EC notified body Institut für Arbeitsschutz der Deutschen Gesetzlichen Unfallversicherung
Alte Heerstraße 111 · 53757 Sankt Augustin
No.: 0121

Cleaning No cleaning or care recommended

Storage Store in a dark, dry place.

Handling New and used gloves should be thoroughly checked. Particularly after cleaning, ensure that they are not damaged (e.g. incisions, holes).

We are not aware of any substances in this product that could cause an allergic reaction.

Disposal The gloves should be disposed of properly as household waste. If they come into contact with chemicals, please consult the chemical manufacturer's waste disposal guidelines.

Warning Gloves should not be worn where there is a risk of being caught in moving machinery parts.