



# BASALT R™

## HIGH ABRASION RESISTANCE AND IDEAL FOR PRECISE OPERATIONS

Ideal for precise operations requiring excellent dexterity and for preventing product contamination. A very supple, stretchable and comfortable mechanical barrier that adapts to every movement. Protects the hand from oils, grease and abrasion, with effective grip.

### FEATURES

- › Good abrasion and tear resistance, with a secure grip
- › Comfortable with an anatomical shaped fit, allowing excellent freedom of movement and reduction of hand fatigue
- › Recommended for precise operations requiring maximum dexterity
- › Ideal for detailed assembly, light fabrication and small parts handling



### SUITABLE FOR

#### Typical Industries

- Automotive
- Construction
- Electronics
- Manufacturing

#### Suitable Applications

- Assembly of Small Components
- Maintenance
- Operating Machinery
- Quality Control
- Second and Final Fix

### CERTIFICATION

CAT II

EN 388:2016



4131X

See overleaf for explanation





# BASALT R™

## PRODUCT INFORMATION

|             |                        |                   |
|-------------|------------------------|-------------------|
| MATERIALS   | LINER:                 | 13 gauge nylon    |
|             | COATING:               | Polyurethane (PU) |
| COLOUR      | Black/Black            |                   |
| LENGTH (mm) | 250 (size dependent)   |                   |
| CUFF STYLE  | Elasticated knit wrist |                   |

## ORDERING DETAILS

| SIZE   | CODE   | PACKAGING          |
|--------|--------|--------------------|
| 6/XS   | SKY410 | 10 pairs per bag   |
| 7/S    | SKY411 | 120 pairs per case |
| 8/M    | SKY412 |                    |
| 9/L    | SKY413 |                    |
| 10/XL  | SKY414 |                    |
| 11/XXL | SKY415 |                    |


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

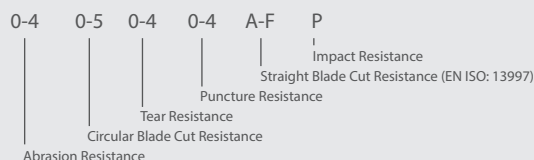

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SKY-DATA-BASALT-R-0420\_1