

FULLY COATED NITRILE IMPACT GLOVE OFFERING GREAT OIL GRIP

Supple and liquid repellent fully coated nitrile glove with nitrile sandy finish on palm providing outstanding oil grip. Flexible and robust TPR to protect against impacts and crushes.

FEATURES

- › Flexible and soft 13 gauge liner provides excellent comfort
- › Full nitrile coating helps to protect the hand from oils, hydrocarbons, grease and abrasion
- › Nitrile sandy finish on palm offers excellent grip properties in wet and oily conditions
- › Flexible, moulded TPR protection zones on knuckles, fingers, thumb and back of hand
- › TPR zones are sewn to the liner for increased lifespan
- › Elasticated wrist provides a secure fit
- › Designed for easy movement and continuous wear



SUITABLE FOR

Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Cargo Handling
- Extraction & refining
- Rigging

CERTIFICATION



See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge nylon
	COATING:	Sandy nitrile over smooth nitrile
COLOUR	Grey/Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with impact protection. Not suitable for thermal, electrical, chemical and cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M 9/L 10/XL 11/XXL	SKG00008BF SKG00008BH SKG00008BJ SKG00008BL	10 pairs per bag 60 pairs per case

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

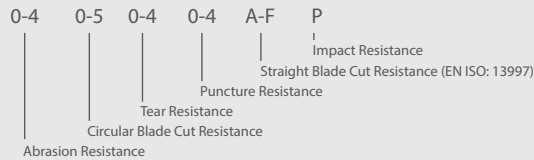

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kJ)	All impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).

UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.