
Information User instruction

Safety gloves against mechanical risks

Manufacturer

UVEX SAFETY Gloves GmbH & Co. KG
Elso-Klöver-Str. 6, 21337 Lüneburg
Postfach 24 47 · 21314 Lüneburg
GERMANY

Tel.: +49 4131 9502-0
Fax: +49 4131 84338
Email: gloves@uvex.de
Website: uvex-safety.de

Type uvex C500 XG
Basic glove material bamboo-rayon/HPPE/glass/polyamide
Available sizes 7, 8, 9, 10, 11


Coating material High Performance Elastomer (HPE), Xtra Grip coating
Smallest packing unit 80 Pairs

Pictogram and performance levels

EN 388 : 2003



4 5 4 2 **Performance levels**

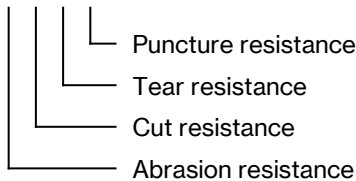

Pictogram and performance levels according to EN 388:2003 (highest performance level: 4/cut resistance: 5)

All levels only apply to the coated areas of the glove.

The overall classification of gloves with two or more unconnected layers does not necessarily denote the performance level of the outer layer.

EC notified body TÜV Rheinland LGA Products GmbH
Tillystraße 2 · 90431 Nürnberg
No.: 0197

Cleaning No cleaning or care recommended

Storage Store in a dark, dry place.

Handling New and used gloves should be thoroughly checked. Particularly after cleaning, ensure that they are not damaged (e.g. incisions, holes).

We are not aware of any substances in this product that could cause an allergic reaction.

Disposal The gloves should be disposed of properly as household waste. If they come into contact with chemicals, please consult the chemical manufacturer's waste disposal guidelines.

Warning Gloves should not be worn where there is a risk of being caught in moving machinery parts.