

SUPERTOUCH[®]


GLOVES

Prochem Heavy Duty Rubber Gloves

XL/10
30cm length

CE 0321

EN 388:2003 EN 374-3:2003 EN 374-2:2003




3121



AKL



CAUTION:
THIS PRODUCT CONTAINS NATURAL RUBBER LATEX. NATURAL RUBBER LATEX MAY CAUSE AN ALLERGIC REACTION IN SOME INDIVIDUALS. IF A REACTION OCCURS, DISCONTINUE USE & SEEK MEDICAL ADVICE.

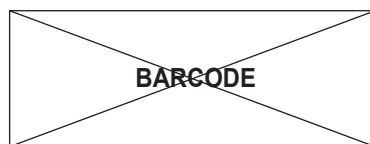

Prochem Heavy Duty Rubber Gloves
Product code: 78074
Colour: Black
Size: XLARGE/10
Length: 30cm

XX

Supertouch[®], Unit 3 Rabone Park, Rabone Lane, Smethwick, West Midlands, B66 2NN
Notified Body: SATRA Technology Centre, Kettering, Northamptonshire, UK, NN16 8SD

EN 420 - Sizing & Dexterity PASS

EN 388 - Mechanical Hazards 3-1-2-1

Test	Abrasion	Cut	Tear	Puncture
Level	3	1	2	1

EN 374-2 Air & Water Leak Tests

Air Leak Test PASS

Water Leak Test PASS

EN 374-3 Permeation Performance Levels

Measured breakthrough time in minutes

Time	10	>30	>60	>120	>240	>480
Level	1	2	3	4	5	6

	Chemical	Chemical Class	EN 374-3 Level
A	Methanol	Primary Alcohol	6
B	Acetone	Ketone	
C	Acetonitrile	Nitrile Compound	
D	Dichloromethane	Chlorinated Paraffin	
E	Carbon Disulphide	Sulphur Containing Organic Compound	
F	Toluene	Aromatic Hydro Carbon	
G	Diethylamine	Amine	
H	Tetrahydrofuran	Heterocyclic and Ether Compound	
I	Ethyl Acetate	Ester	
J	n-Heptane	Hydrocarbon	
K	Sodium Hydroxide (40%)	Inorganic Base	6
L	Sulphuric Acid (96%)	Inorganic Mineral Acid	6
L	Hydrochloric Acid (37%)	Inorganic Mineral Acid	5
L	Nitric Acid (69%)	Inorganic Mineral Acid	4

USE & CARE:

Always inspect your gloves before use. Cuts, tears and punctures are of principal concern. Discolouration or stiffness may indicate non-uniformities in the rubber, or may be a result of chemical attack from previous use. Any damaged gloves should be discarded and replaced prior to use.

Refer to the Chemical Resistance Guide and Physical Performance Chart (above) and select a glove with the highest rating for the chemicals and physical conditions. Always refer to the chemical label and Material Safety Data Sheet (MSDS) before use, as this may recommend a specific glove type.

The information stated in this guide is advisory only. The purchaser must determine the suitability of the glove for use with a specific chemical prior to use.

STORAGE:

Keep in a cool, dry place (min 18°C) away from direct sunlight and heat.

DISPOSAL:

Follow EEC and UK Directives for correct disposal.

CAT III

CE 0321

