



HAND PROTECTION RANGE

TECHNICAL
PRODUCT DATASHEET

CUT PROTECTION RANGE



HEAT PROTECTION



UPDATED: 10/04/2019

A827K

Kevlar® lined nitrile gauntlet

Excellent cut protection due to the integral Kevlar® liner. Full nitrile coating provides good resistance to oils and grease. Excellent resistance to abrasion, tears and punctures in this hard wearing glove. Soft nitrile coated cuff gives added protection against oils and other liquids. Ideal for heavy handling applications.

Kevlar® and DuPont™ are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

TDM CUT **C**

FEATURES AND TECHNOLOGY

CUT
RESISTANTHEAT
TESTED

WATERPROOF

OIL
REPELLENT

KEVLAR®



NITRILE

TYPICAL INDUSTRIES




ENGINEERING

OIL, GAS
& MININGSTEEL &
METALWASTE &
RECYCLING

TECHNICAL INFORMATION

ORDER REF #	G/A827K	
COATING MATERIAL	NITRILE	
PACKING	PER PACK: 12	PER CASE: 48
SIZES AVAILABLE	9 (L), 10 (XL)	
EU TYPE CERTIFICATION BY	SATRA Technology Europe Ltd, Bracetown Business Park, Clonee, Dublin, D15 YN2P, Ireland (Notified Body No. 2777)	

CERTIFICATION AND STANDARDS (SEE OVERLEAF FOR FURTHER DETAILS)

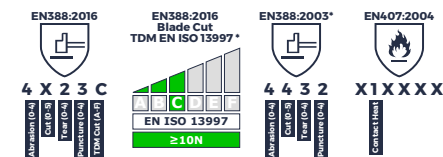

* 'X' denotes not tested.
* Where applicable, EN388:2016 scores take precedent and are ongoing.
* There is no correlation between coupe test levels and EN ISO 13997 / TDM cut test levels.

CAT II



HAND PROTECTION RANGE

TECHNICAL
PRODUCT DATASHEET

CUT PROTECTION RANGE



HEAT PROTECTION



UPDATED: 10/04/2019

CERTIFICATION LEGENDS

EN388:2016



Abrasion (D-4)
Cut (D-5)
Tear (D-4)
Puncture (D-4)
TDM Cut (A-F)
Impact (P)

EN388:2016
Blade Cut TDM
EN ISO 13997*

* For dulling during cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.

NEWTON LEVEL
≥ 30 F
≥ 22 E
≥ 15 D
≥ 10 C
≥ 5 B
≥ 2 A

EN407:2004



Burning Behaviour (D-4)
Contact Heat (D-4)
Convective Heat (D-4)
Radiant Heat (D-4)
Small Splashes Molten Metal (D-4)
Large Quantity Molten Metal (D-4)

EN511:2006



Corrosive Cold (D-4)
Contact Cold (D-4)
Water Penetration (D-1)

* For details regarding maximum permissible user exposure, see separate sheet.

* Testing carried out on the palm material. Except in cases where the glove is equal to or over 400mm - where the cuff is tested also tested. * 'X' denotes Not Tested. * Where applicable, EN388:2016 scores take precedent and are ongoing. There is no correlation between coupe test levels and ISO 13997 / TDM cut test levels. Where both EN388:2016 and EN388:2003 scores are shown, the latter is shown for informational purposes only.

FURTHER INFORMATION

STORAGE / TRANSPORT: Keep away from direct sunlight; store in a cool dry place. Keep away from ozone sources or naked flame. Store the gloves in their original packaging. During transportation, ensure the product is well packaged and protected in order to prevent any damage.

PRECAUTIONS BEFORE USE: 1. Never use these gloves with chemicals. 2. Gloves should not be used when there is a risk of entanglement with moving machine parts. 3. Before usage and periodically during usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged, dirty or worn out gloves. 4. The gloves should not come in contact with a naked flame or fire. 5. Do not subject to high speed or serrated blades. 6. Always read enclosed user instructions before using these gloves. 7. Whilst these gloves are highly cut resistant, they are not cut proof. 8. The information provided is for products in a new condition and does not reflect the actual duration of protection in the workplace. 9. Service life cannot be specified and depends on the application and the responsibility of the user to ascertain suitability of the glove for its intended use.

CONSTITUENTS / ALLERGIES: Some gloves may contain ingredients which are known to be a possible cause of allergies in sensitive persons who may develop irritant and/or allergic contact reactions. If an allergic reaction should occur seek medical advice immediately. This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

For more information about this product, or to access the Declaration of Conformity or Product Certification, visit:
<https://www.ultimateindustrial.co.uk/product/89-A827K>

If appropriate to the product, ECEU Declaration of Conformities, relevant certification and supporting documentation are available to access through your distributor, at the above web address or by contacting UCI customer services quoting the product reference code. This document and any other statement provided herein by or on behalf of UCI are given for informational purposes and do not constitute a contractual agreement nor warranty of merchantability. UCI assumes no responsibility for the suitability or adequacy of an end user's selection of product for a specific purpose. The manufacturer reserves the right to make any modifications it deems necessary. All product and company names are trademarks™ or registered® trademarks of their respective holders. DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company. © UCI Limited, 2019



Phone: +44 (0)1902 451 451
Fax: +44 (0)1902 451 271
Email: sales@ultimateindustrial.co.uk
Web: www.ultimateindustrial.co.uk



Ultimate
Industrial | Leadership in
PROTECTION.™

© 2019, Ultimate Cleaners (Industrial) Ltd.
Victoria House, Colliery Road, Wolverhampton, WV1 2RD, UK
Registered in England No. 2035621



Phone: +44 (0)1902 451 451
Fax: +44 (0)1902 451 271
Email: sales@ultimateindustrial.co.uk
Web: www.ultimateindustrial.co.uk



Ultimate
Industrial | Leadership in
PROTECTION.™

© 2019, Ultimate Cleaners (Industrial) Ltd.
Victoria House, Colliery Road, Wolverhampton, WV1 2RD, UK
Registered in England No. 2035621